

### 3000 Series

Single Color Light Engine



#### 90+ CRI White Single Bin

- 22** 2150K
- 24** 2350K
- 26** 2550K
- 27** 2650K
- 30** 2950K
- 35** 3450K
- 40** 3950K

#### Colors

- R** Red
- A** Amber
- B** Blue
- G** Green



- 90+ CRI
- UL Class 2
- IP20 Dry Location
- Custom Cut to Fit
- 50,000 Hour Min. Lifespan

Requires: Aion LED Driver, Approved Controller, Aion LED Housing. Sold Separately, Not Included

80+ CRI Available via Special Order

Tested as suitable for use within clothing closet spaces by ETL/Intertek

Must be installed in accordance with NEC 410.16 for use in clothing closet spaces



Components of a complete system include: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

## 3924-LE

Standard Output



90+CRI

1.4W /ft.


≤ 116 Lm/ft.

RANGE BY CCT (X-Y)

Class 2 Circuit Limitation:  
56'

Max. Increment:  
32 ft.

Min. Increment:  
4 in.

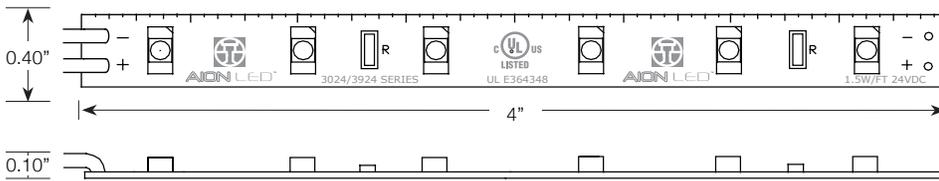

	3924-22-LE	3924-24-LE	3924-26-LE	3924-27-LE	3924-30-LE	3924-35-LE	3924-40-LE
TOTAL LUMENS	80.84	100.17	93.77	99.38	107.50	111.24	118
INPUT POWER (W)	1.40	1.44	1.37	1.33	1.35	1.32	1.43
EFFICACY	57.71	70	69	75	80	84	82
COLOR RENDERING INDEX (CRI)	94	91	96	92	92	91	
R9	71.10	53.18	83.25	66.10	69.20	67.88	
INPUT VOLTAGE (VDC)	24	24	24	24	24	24	24
INPUT CURRENT (AMP)	0.06	0.06	0.06	0.06	0.06	0.05	0.06
CORRELATED COLOR TEMPERATURE	2150K	2400K	2550K	2700K	2950K	3450K	3950K



Components of a complete system include: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



AIONLED.COM | (415) 255-AION

Modified: March 14, 2018

© 2018 Aion LED. All Rights Reserved